



NOTES:



Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Housing Material:PA9T+30%GF(UL94V-0)
 Latch Material:PA9T+30%GF(UL94V-0)
 Contact Material:Brass
 Contact plating:Au or Sn over Ni Plated
 Fixed Axle Material:Brass
 Fixed Axle plating:Ni Plated


Ordering Information

3223 - XX S XX B X X 1

No.of Pins Contact Plating Insulator Color Latch Type Packing
 10 34 G0=Gold Flash B=Black L=Long Latch T=Tube
 14 40 G1=3u"Gold S=Short Latch A=Tray
 16 50 G3=5u"Gold
 20 60 G3=10u"Gold
 26 64 G4=15u"Gold
 30 G5=30u"Gold
 SR=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

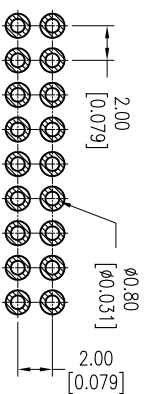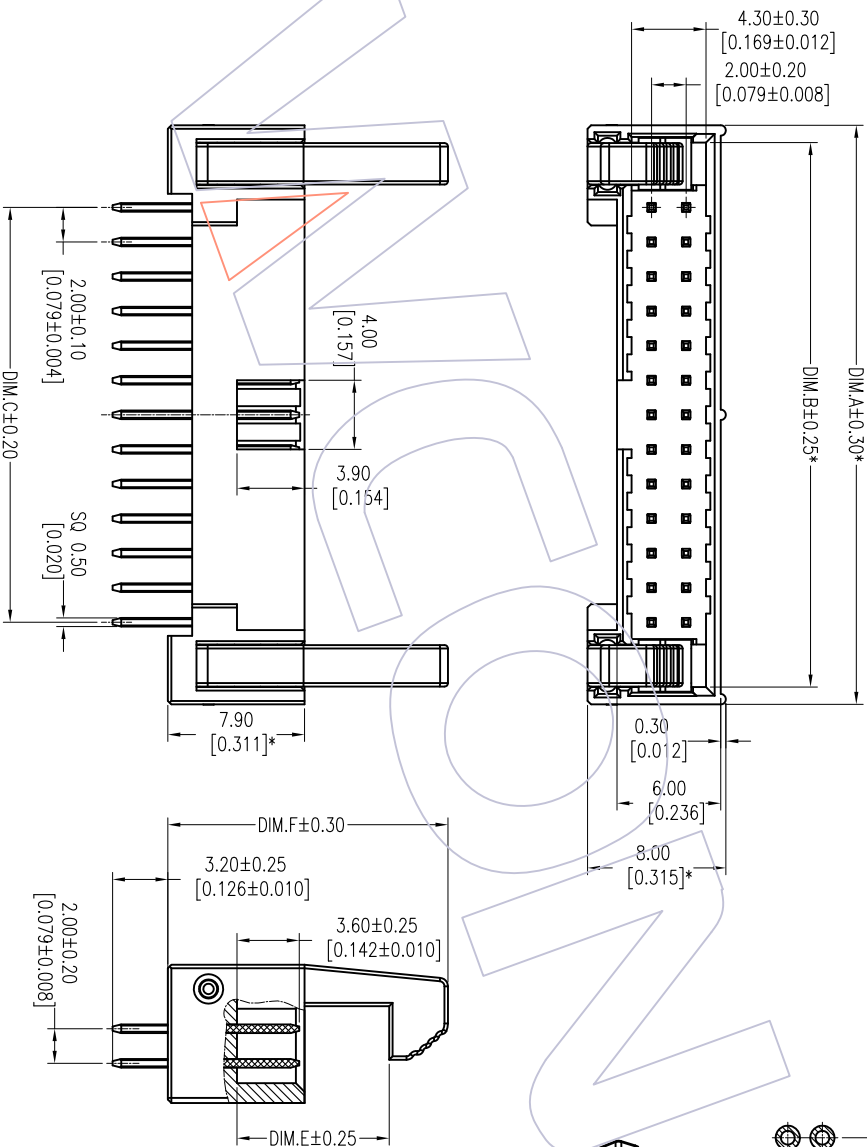

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)



PART NO.	DIM.E	DIM.F
3223-XXSXBX1	13.10	20.50
3223-XXSXBSX1	8.80	16.20

No.Of POSITION	DIM.A	DIM.B	DIM.C
10	17.50	15.50	8.00
12	19.50	17.50	10.00
14	21.50	19.50	12.00
16	23.50	21.50	14.00
20	27.50	25.50	18.00
22	29.50	27.50	20.00
24	31.50	29.50	22.00
26	33.50	31.50	24.00
30	37.50	35.50	28.00
34	41.50	39.50	32.00
40	47.50	45.50	38.00
44	51.50	49.50	42.00
48	55.50	53.50	46.00
50	57.50	55.50	48.00
68	75.50	73.50	66.00



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A1	2016/01/11	MODIFY DRAWING		XX	William Chen	2016/01/11	mm	A4	3223-XXSXXBX1	2.00 EJECTOR HEADER S/T	
A0	2013/11/04	NEW		XXX			inch	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	PROJ.			
				± 3'			1/1				

H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A