

# HSF

**NOTES:**

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C





Contact Material: Brass  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA6T+30%G.F UL94V-0

## Ordering Information

3123-XX S XX B D00 X 1

- No. of Pins  
10 30  
14 34  
16 40  
20 44  
24 50  
26 60
- Contact Plating  
G0=Gold Flash  
G3=10u"Gold  
G4=15u"Gold  
G5=30u"Gold  
S0=Gold Flash/Tin  
S3=10u"Gold/Tin  
S4=15u"Gold/Tin  
S5=30u"Gold/Tin  
SN=Tin
- Color Insulator  
B=Black  
W=White
- Packaging  
T=Tube

Item	Pitch	Mating	DIM(A)	DIM(C)
Standard	2.00	2263	4.95	
Alternate				

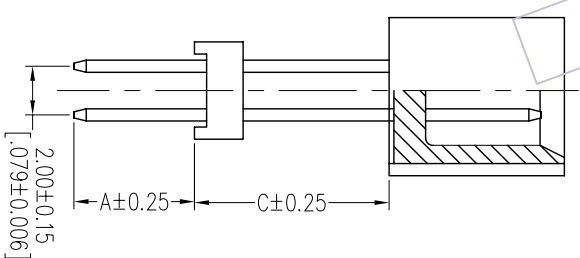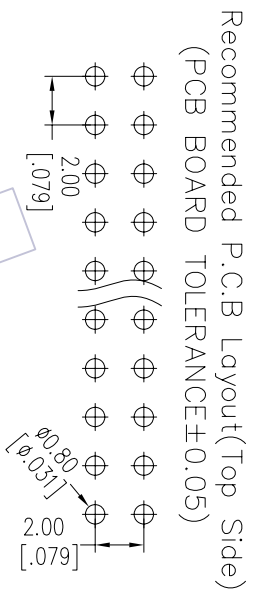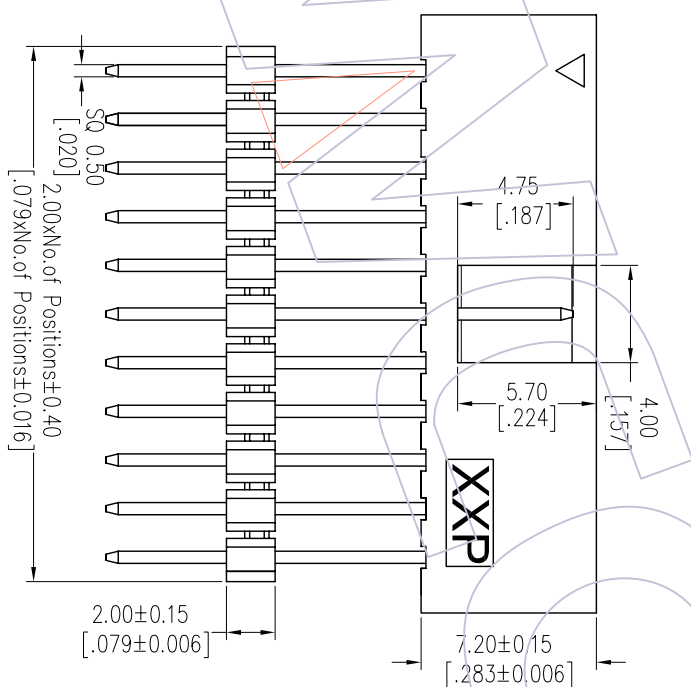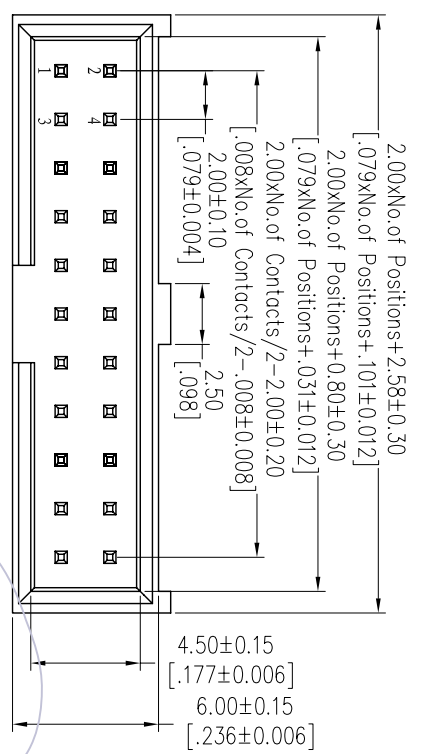

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/09/24	NEW		XX	JYHuong	2012/09/24	mm	A4	3123-XXSXXBD00X1	2.00 BOX HEADER 180° H=7.2 ADD HOUSING	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
				XX	JYHuong	2012/09/24	mm	A4	3123-XXSXXBD00X1	2.00 BOX HEADER 180° H=7.2 ADD HOUSING	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

# WCON

Http: www.wcon.com