

# HSPF

**NOTES:**





- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information

2220-1 XX M XX CUNT X

No of Pins per ROW=02-40PIN  
 Contact Plating: GP=Gold Flash  
 G3=10μr Gold  
 G4=15μr Gold  
 G5=30μr Gold

Packing: T=Tube  
 Series No. 1=TYPE1  
 2=TYPE2

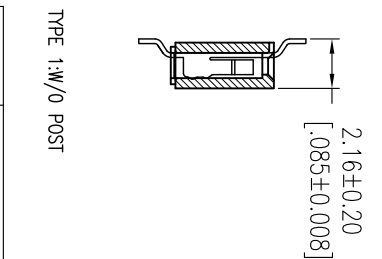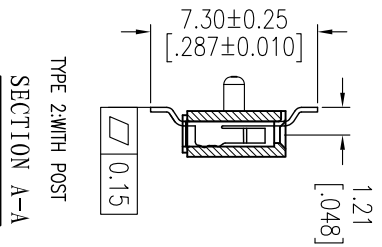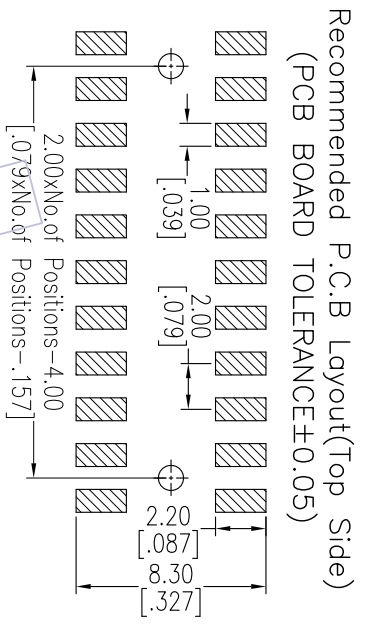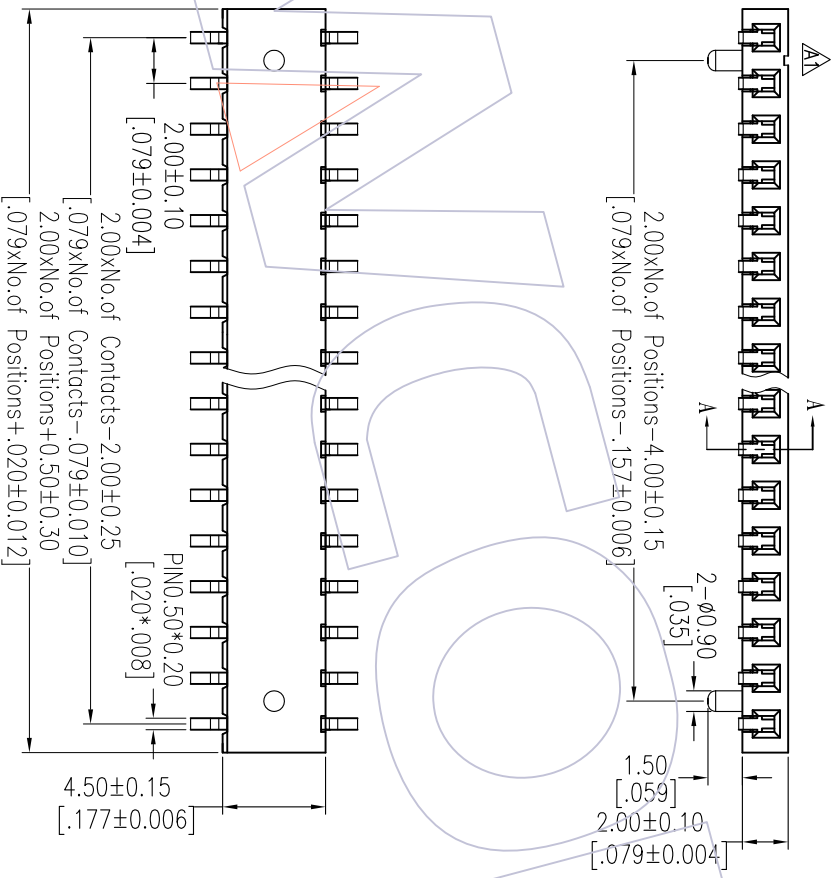

Item	Pitch	Mating
Standard	2.00	1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A1	2013/03/26	Modify Drawing
A0	2012/12/06	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	Wang	2013/03/26	UNIT	mm	2220-1XXMXXCUNT X
X.XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	CHECK	DATE	SHEET	1/1	FH2.00mm SINGLE ROW 180° SMT
Angle	APPROVE	DATE	PROJ.		SIDE ENTER H=2.0
DM	TOL				Customer NO.

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: [sales@wcon.com](mailto:sales@wcon.com)

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: [sales@wcon.com](mailto:sales@wcon.com)